
EMPLAIS PISCINAS, POWDER PRODUCT FOR FILLINGS IN POOLS.

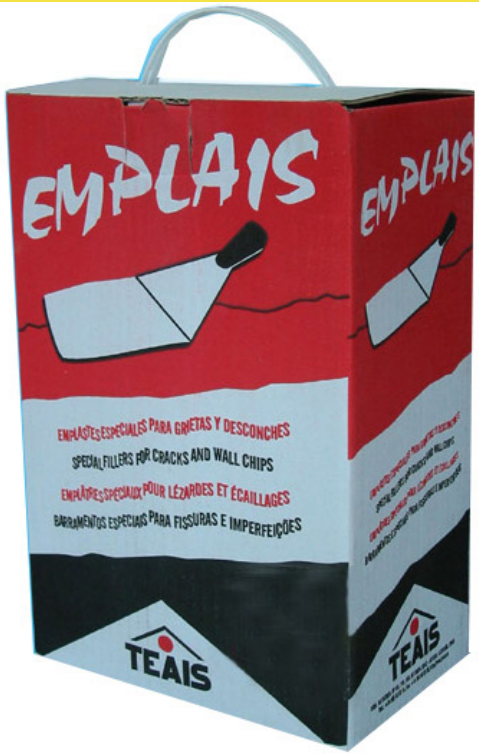

Descripción

White powder product that mixed with water becomes in a plastic blend suitable for plasting cracks and scalings in walls and floors.

Aplication

For removing unevennesses on the surfaces to paint. For removing cracks and fisures.

Surface preparation

The surface must be clean and perfectly dry, free of greases, saltpeter and dust, being compact and without loose parts.

Modes of application

EMPLAIS PISCINAS must be mixed with water until obtain a blend with plastic consistency .
-It must be applied on the clean and dry support bu a trowel or spatula achieving a thin coat at the same level than the surface.
- In the filling of small fissures or cracks it must be applied by trowel and once it is dry can be sanded before harden completely. It is not recommedable to apply layers thicker than 5 mm. MORIS (MORTAR FOR

Avda. da Enerxía, nº 153, Pol. Ind. de Sabón
15143 Arteixo,A Coruña
Telf.: 981 602 111
Fax.: 981 601 508
Email.: desarrollo@teais.es

síguenos en:

REPAIRING) must be used for fillings thicker than 5 mm or apply with EMPLAIS PISCINAS more than one layer.- For filling fissures is recommendable to use a grinder in order to obtain more defined edges and to improve the setting of the reparations.
- The fissures also can be repaired with EPOAIS H that is epoxy paste with thixotropic consistence, high adherence and high mechanical resistance. This paste must be used when higher mechanical requirements are required.

Clean up

Whit plenty of water.

Data sheet

Water absorption

Adherence

Capillarity

Mass of density

Powder density

Compressive resistance

Flexural strength resistance

Water retention

Open time

Colour/s

Performance

1 sqm per kg in layer of 1 mm.

Storage

2 yeasrs in their original packages, tightly closed and protected from the weather.

TEAIS
Avda. da Enerxía, nº 153, Pol. Ind. de Sabón
15143 Arteixo,A Coruña
Telf.: 981 602 111
Fax.: 981 601 508
Email.: desarrollo@teais.es
síguenos en:

Security



Indications of danger:

H315: H315:Causes skin irritation.

H317: H317:May cause an allergic skin reaction.

H318: H318:Causes serious eye damage.

H335: H335:May cause respiratory irritation.

Prudence advice:

P271: P271:Use only outdoors or in a well-ventilated area.

P280: P280:Wear protective gloves/protective clothing/eye protection/face protection.

P302+P352: P302+P352:EIF ON SKIN: Wash with plenty of soap and water.

P304+P340: P304+P340:IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing.

P305+P351+P338: P305+P351+P338:IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.

P310: P310:Immediately call a POISON CENTER or doctor/physician.

P403+P233: P403+P233:Store in a well-ventilated place. Keep container tightly closed.

P501: P501:Dispose of contents/container in accordance with local/regional/national/international regulation