


Descrip tion

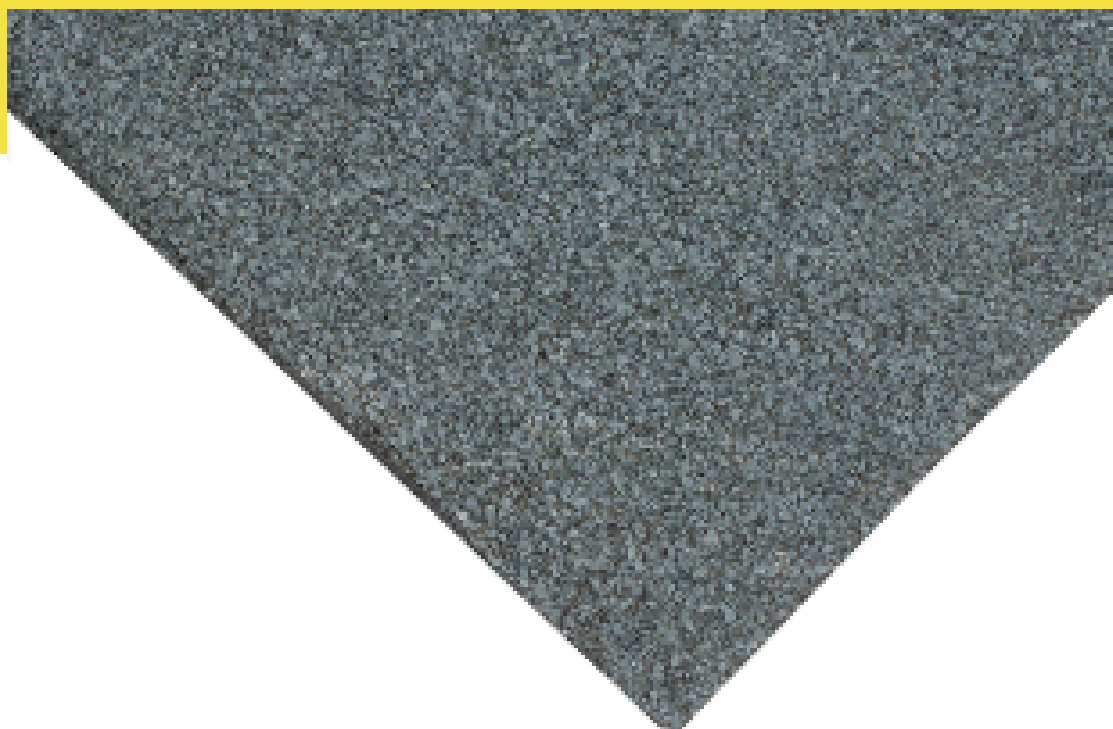

Aplication

For waterproofing garden roofs. Waterproofing of intensive and extensive garden roofs (membranes GA-2, GA-6 according to UNE 104-402 / 96 standard).

Surface preparation

The surface of the support must be resistant, uniform, smooth, clean and dry, free from foreign bodies.

Modes of application

Multilayer membrane top sheet with mineral self-protection. The sheet is arranged in the same direction as the lower sheet by displacing the line of overlap approximately halfway through the roll. The sheet is completely welded to the previous one with a torch. The overlaps are to be welded and will be 12 cm, both in the longitudinal direction and in the transverse direction.

- In the case of monolayer membranes, it will be welded to the support previously primed with Lastois IN.

Clean up

With cleaning solvents

Data sheet

4,75 kg/sqm

5 kg/sqm

< 0,3% UNE EN 1107-1

Resistance to high temperature fluency > 100°C UNE EN 1110

E UNE EN 11925-2; UNE EN 13501-1

Pass UNE EN 1928

700 +/- 200 N/5cm UNE EN 12311-1

450 +/- 150 N/5 cm UNE EN 12311-1

Flexibility at low temperatures < -15 °C UNE-EN 1109

20.000 (M2.S.Pa)/kg UNE-EN 193

Performance

1,12 sqm/sqm

Storage

One year in its original packaging protected from the elements in a cool and dry place.



📍 Avda. da Enerxía, nº 153, Pol. Ind. de Sabón
15143 Arteixo, A Coruña
☎ Telf.: 981 602 111
📠 Fax.: 981 601 508
✉ Email: desarrollo@teais.es

síguenos en:

